



Project _____

Item numbers _____

Quantity _____

Length _____

LED LIGHT BAR

Adjustable light bar posts are made with 304 stainless steel. It can be used in multi bays options. It is supported with 1" tubing and 2"-1/2" twist-lock compression flange. This model is an optional LED lighting bar for other sneeze guard products, which brightens your food on display. ADM Sneeze guards have been manufacturing sneeze guards for over 33years located in Antioch California. We have a solid reputation and are known thru out the industry as offering a durable and cost-effective product.



Model Features

- Multiple configuration
- Available with different sections
- Twist lock Compression flange

Standard Features


- Conformance with ASTN C1048-04 and tested to ANSI Z97.1 standard and certified.
- Multiple finishes
- Adjustable height


Options

- Brushed Stainless Steel
- Powder Coat RAL.....Color
- 6 ft. Lead

Accessories

- Adjustable Brackets Pairs
- Standard Flange
- Flange Cover
- Support post PC/SS
- Post clip

 All products are manufactured to the highest standards in accordance to NSF and SGCC guidelines. To read more please see our website at www.sneeze-guard.com

 Please read our Installation and operating manual for safety and installation guidance.





LED LIGHT BAR



Standard Flange



Flange with Cover



Standard Flange

The standard flange is approx. 2" in diameter and accepts a number 8 course drywall screw. We recommend a 2" long screw for most installations, screws are not included as we do not know what surface type you will be mounting onto so the length of the screw will vary ([see video](#)).

Flange with Cover

Flange covers are designed to fit over existing flanges and hid the mounting screws from view and debris that may fall into screw heads ([see video](#)).



Above Counter Compression



Below Counter Compression



Below Counter Compression

The below counter compression allows for thru the counter installs and allows for adjustment of post height after install. This flange can not only clamp onto counter but also compress onto post. It can also be reversed mounted so not to void out any solid surface warranty. Speed socket for 3/8" drive ratchet is included ([see video](#)).











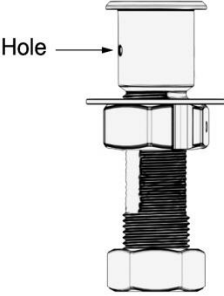
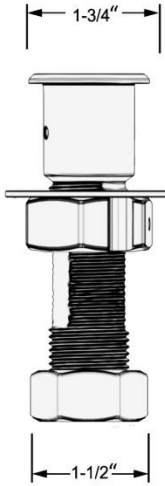
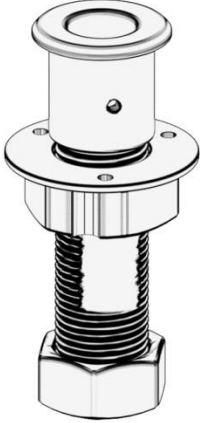
Below Counter Compression

The below counter compression allows for thru the counter installs and allows for adjustment of post height after install. This flange can not only clamp onto counter but also compress onto post. It can also be reversed mounted so not to void out any solid surface warranty. Speed socket for 3/8" drive ratchet is included ([see video](#)).



LED LIGHT BAR

DIMENSIONS (Shown in inches)

<p>Standard Flange</p>	<p><u>Top view</u></p> 	<p><u>Front view</u></p> 	<p><u>Perspective view</u></p> 
<p>Flange with Cover</p>	<p><u>Top view</u></p> 	<p><u>Front view</u></p> 	<p><u>Perspective view</u></p> 
<p>Above Counter Compression</p>	<p><u>Top view</u></p> 	<p><u>Front view</u></p> 	<p><u>Perspective view</u></p> 
<p>Below Counter Compression</p>	<p><u>Top view</u></p>  <p>Hole →</p>  <p>Hole required 1-3/8"</p>	<p><u>Front view</u></p> 	<p><u>Perspective view</u></p> 



LED LIGHT BAR

LED LIGHT BAR

This product is covered by one or more of the following patents with additional pending.

- [USD427460S](#) [US6132018A](#) [US8196872B1](#)
- [US9557004B1](#) [USD866309S1](#) [US8936223B1](#)
- [USD699546S1](#) [US9062483B1](#) [USD720604S1](#)
- [USD741696S1](#) [USD741157S1](#) [USD659517S1](#)
- [US8973876B1](#) [USD752908S1](#) [US8302919B1](#)
- [USD625984S1](#) [USD720605S1](#) [USD636658S1](#)
- [US9399882B1](#) [USD719820S1](#) [USD867117S1](#)
- [US9144329B1](#) [USD625170S1](#) [USD719821S1](#)
- [USD741697S1](#) [USD690190S1](#) [US8898862B1](#)
- [US8925153B1](#) [USD625170S1](#)



LED Light Bar

6 ft. lead

LED BAR SPECIFICATION

LED Bar SIZE	24"	30"	36"	42"	48"	54"	60"	66"	72"	78"	84"
Sections	1	1	1	2	2	3	3	3	3	4	4
LED Bulb	18	18	18	18*2	18*2	18*3	18*3	18*3	18*3	18*4	18*4
110v input	12vDC	12v DC	12vD C	12v DC	12v DC	12v DC	12v DC	12vDC	12vDC	12vDC	12vDC
Lumens	360	360	360	720	720	1080	1080	1080	1080	1440	1440

Dimensions

LED LIGHT BAR dimension for 1 Bay is 24"- 84", and each section has 18 LED bulbs.

Shipping

- Shipping with minimum time
- Shipping with safe packaging
- Shipping exact location
- Shipping multi-bay with different-different parts





LED LIGHT BAR

Specifications Bays Options

Select Bay	Measurements	Options
	Centerline	Post Finish
1Bay	24"-84"	Brushed stainless/Coated Black

Dimensions

LED LIGHT BAR dimension for 1 Bay is 24"- 84", and each section has 18 LED bulbs.

Shipping

- Shipping with minimum time
- Shipping with safe packaging
- Shipping exact location
- Shipping multi-bay with different-different parts

Installation requirements

You need to specification those places which are want to install of this product. Tell us your requirements about bays size, post height, and led bar sections.

LED LIGHT BAR Specification

In this model of LED LIGHT BAR include both sides (Left & Right) post. Each Post distance is up to 84". Its finishes with brushed stainless steel, and powder coat black. The Led bar each section has 18 Led bulbs, and the post height is 18". The led bar is the most important part of all models which brings a beautiful look.

It can be easily installed on the food counter or reception desk with any kind of sneeze guard post. Post with standard base flange options with cover. Specially used for food counter or buffet system.





LED LIGHT BAR

